




R3 Plus
Magnesium Alloy




500x500mm

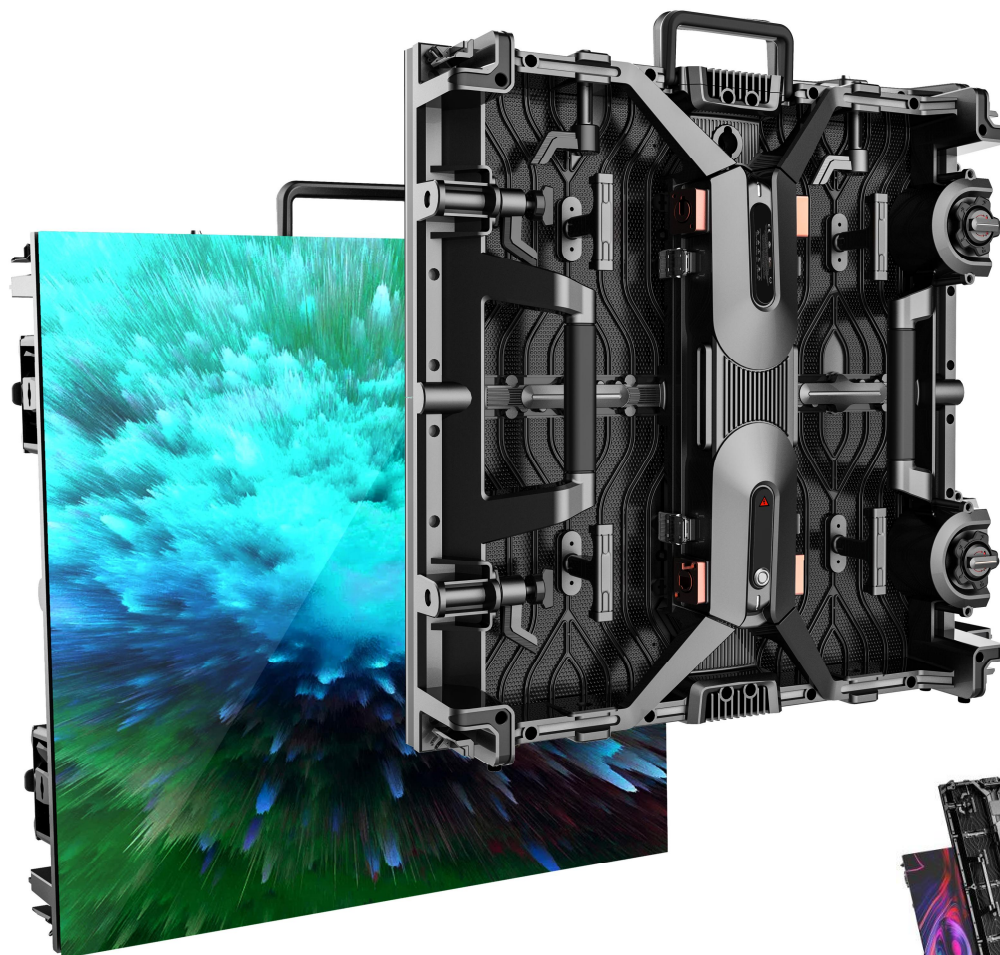

500x1000mm

Indoor P2.6,P3.9
Outdoor P3.9,P4.8

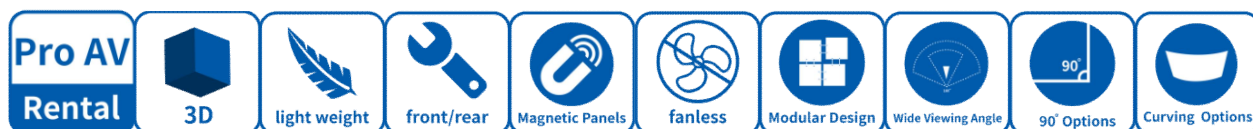

Indoor & Outdoor LED Display for Pro AV rental

Living Broadcasting / AV Production / TV Studio / Events

R3 plus highlights




Magnesium alloy for AV rental
only 6kg/tile Lightweight

Front/Rear maintenance

LED module use magnet design,
it can do easy and fast maintenance

Real stable and durable

Hub card design, no additional power/data cables inside.
Easy install and no troubles, real stable and durable.

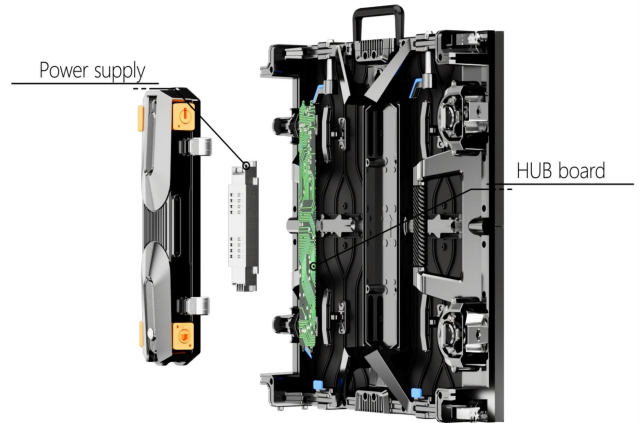

Anti-collision design

The corner protection cover can protect the LED
panel from setup/tear down/transport, let your LED
panel always keep better condition than others

Convex/concave design(options)

Our curve lock system can give you a very smooth
curve shape, help you get creative and high quality
request AV production



R3 Plus Specification

Item	R3 Plus (indoor/outdoor rental)			
Pixel Pitch	P2.6 indoor	P3.9 indoor	P3.9 outdoor	P4.8 outdoor
LED per pixel	SMD1515	SMD2121	SMD1921	SMD1921
Pixel Density(per sqm)	147456	65536	65536	43264
Module Dimension(WxH)	250x250mm	250x250mm	250x250mm	250x250mm
Module Resolution	96x96 pixels	64x64 pixels	64x64 pixels	52x52 pixels
Scan Rate	1/24	1/16	1/16	1/13
Cabinet Dimension(WxHxD)	500x500x74mm	500x500x74mm	500x500x74mm	500x500x74mm
Cabinet Resolution(500mm)	192x192 pixels	128x128 pixels	128x128 pixels	104x104 pixels
Best View Distancing	>2m	>3m	>3m	>4m
Refresh Rate	3840Hz	3840Hz	3840Hz	3840Hz
Viewing Angle(H/V)	160°/140°	160°/140°	160°/140°	160°/140°
Cabinet Material	Magnesium alloy	Magnesium alloy	Magnesium alloy	Magnesium alloy
Curve(options)	+/-3/6°	+/-3/6°	+/-3/6°	+/-3/6°
Maintenance	Front/Rear	Front/Rear	Rear	Rear
Single Cabinet Weight	6.2/10.4kgs	6.2/10.4kgs	6.2/10.4kgs	6.2/10.4kgs
Brightness	800-1200nits	800-1200nits	3500-4500nits	3500-4500nits
Max Power Consumption	480w	480w	700w	700w
Avg Power Consumption	240w	240w	350w	350w
Ingress Protection	IP30	IP30	IP65(F) / IP54(R)	IP65(F) / IP54(R)
Lifetime(Hrs)	100,000	100,000	100,000	100,000

*product spec are for reference only,the final interpretation right of product is reserved by Holiled



SHENZHEN HOLILED TECHNOLOGY CO.,LTD

Add:5F,Building A,ShengDe Lan Industrial Park,
Kukeng,Guanlan,Shenzhen,China
<http://www.holiled.com>

sales@holiled.com
sales01@holiled.com
sales02@holiled.com
sales03@holiled.com
sales04@holiled.com
sales05@holiled.com
sales06@holiled.com
sales07@holiled.com
sales08@holiled.com