



UHDA(4:3) Series

4000+sqm exported in 2024

<https://drive.google.com/drive/folders/1mZFZkC2aIfRYzXEJox6JsvGUcsF21PQT>



Indoor SMD P1.25, P1.53, P1.86, P2.0, P2.5

Indoor COB P1.53, P1.86

LED Module Size: 320x160mm

960x480mm(WxH)

640x640mm(WxH)

640x480mm(WxH)


640x320mm(WxH)



Fine Pitch UHDA(4:3) indoor LED Display

For Airport/Control Room/Shopping Mall/others

UHDA(4:3) highlights

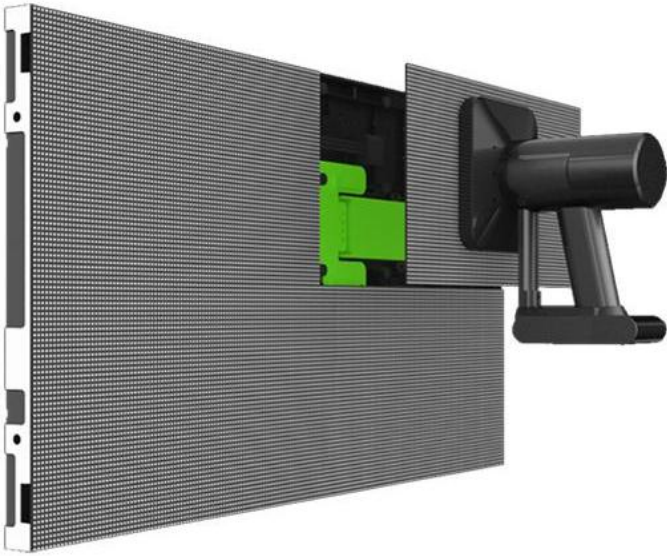

full front maintenance

no need maintenance channel, save space
LED module, PSU, RX Card can replace in front

low cost to upgrade smaller pixel pitch

LED module size is 320x160mm,
can do P1.2, P1.5, P1.8, P2.0 and P2.5



ultra thin and light weight

only 60mm thickness and 6.8kg/panel
can 640x480/320mm size.

silence work with high precision

high precision Die-casting aluminum cabinet
real seamless best for Fine Pixel Pitch LED



Item	Fine Pitch UHDA(4:3) Series (indoor fix installation)				
Pixel Pitch	P1.25 indoor	P1.53 SMD/COB Stock available	P1.86 SMD/COB Stock available	P2.0 SMD Stock available	P2.5 SMD Stock available
LED per pixel	SMD1010	SMD1212	SMD1515	SMD2020	SMD2020
Pixel Density(per sqm)	640000	422600	289050	250000	160000
Module Dimension(WxH)	320x160mm	320x160mm	320x160mm	320x160mm	320x160mm
Module Resolution	256x128 pixels	208x104 pixels	172x86 pixels	160x80 pixels	128x64 pixels
Scan Rate	1/64	1/52	1/43	1/40	1/32 or 1/64
Cabinet Dimension(WxH)	960x480mm 640x640mm 640x480mm 640x320mm	960x480mm 640x640mm 640x480mm 640x320mm	960x480mm 640x640mm 640x480mm 640x320mm	960x480mm 640x640mm 640x480mm 640x320mm	960x480mm 640x640mm 640x480mm 640x320mm
Cabinet Resolution (640x480)	512x384 pixels	416x312 pixels	344x258 pixels	320x240 pixels	256x192 pixels
Best View Distancing	>1m	>1m	>1m	>2m	>2m
Refresh Rate	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz
Viewing Angle(H/V)	160°/140°	160°/140°	160°/140°	160°/140°	160°/140°
Cabinet Material	Die-casting	Die-casting	Die-casting	Die-casting	Die-casting
Maintenance	Front	Front	Front	Front	Front
Single Cabinet Weight	6-7kgs	6-7kgs	6-7kgs	6-7kgs	6-7kgs
Brightness	600-800nits	600-800nits	600-800nits	600-800nits	600-800nits
Max Power Consumption	600w	600w	600w	600w	600w
Avg Power Consumption	300w	300w	300w	300w	300w
Ingress Protection	IP30	IP30	IP30	IP30	IP30
Lifetime(Hrs)	100,000	100,000	100,000	100,000	100,000
Working Temperature	-20°~+60°	-20°~+60°	-20°~+60°	-20°~+60°	-20°~+60°
Storage Temp/Humidity	-40°/60°; 10%-60%RH				

*product spec are for reference only,the final interpretation right of product is reserved by Holiled



1. website



2. facebook



3. stock



4. youtube

SHENZHEN HOLILED TECHNOLOGY CO.,LTD

Add:4F,No.5 Block,HKC Industrial Park,
Shiyan,Shenzhen,China
<http://www.holiled.com>

sales@holiled.com
sales01@holiled.com
sales02@holiled.com
sales03@holiled.com
sales04@holiled.com
sales05@holiled.com
sales06@holiled.com
sales07@holiled.com
sales08@holiled.com