





Indoor P1.95,P2.6,P2.9,P3.9
Outdoor P2.9,P3.9

500x500mm/500x1000mm
GOB is optional

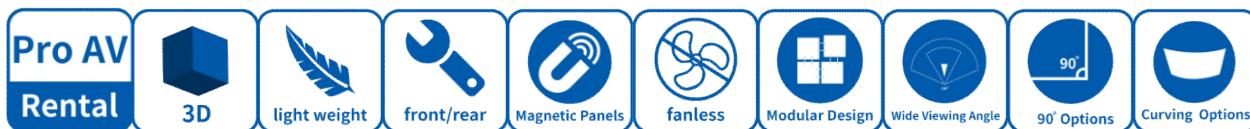

Creative Flexible Indoor & Outdoor LED Display for Pro AV rental

Living Broadcasting / AV Production / TV Studio / Events/Exhibition

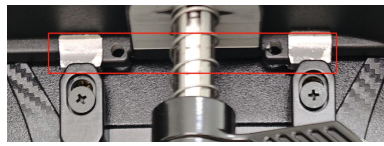


Module fast lock

LED module use fast lock design,
The knob can lock the module just ONE step

Only 6.8 kgs/cabinet

HoFLEX Series adopts die-casting aluminum panels
only 6.8 kg/cabinet, and its thickness is 84 mm

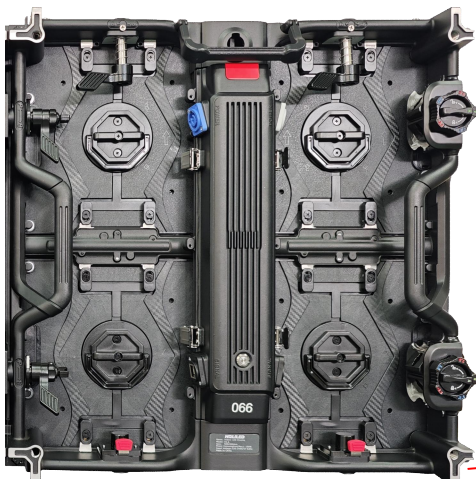

Anti-collision design


The corner protection cover can protect the LED lamps
from setup/tear down/transport, let your LED panel
always keep better condition than others



Convex/concave design(options)

Our curve lock system can give you a very smooth curve
shape, help you get creative AV production



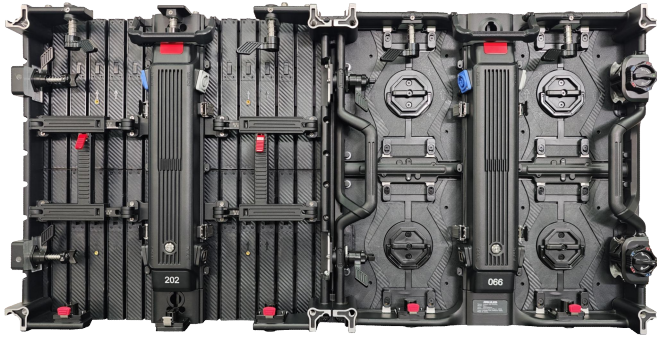


Mixed splicing

HoFLEX is compatible with HoLite panels, support you reach various creative ideas


What stage ideas you can get




Ultra flatness

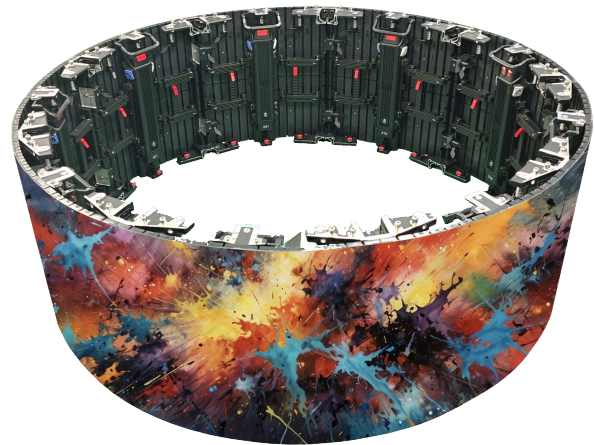

smallest circle (8 cabinets) or
4 cabinets (dismantle the lock arm)

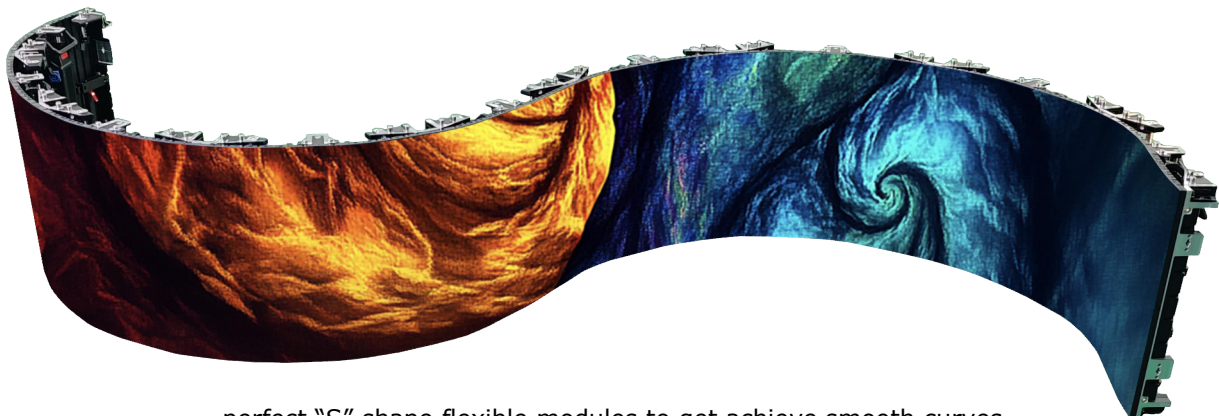

perfect "S" shape, flexible modules to get achieve smooth curves

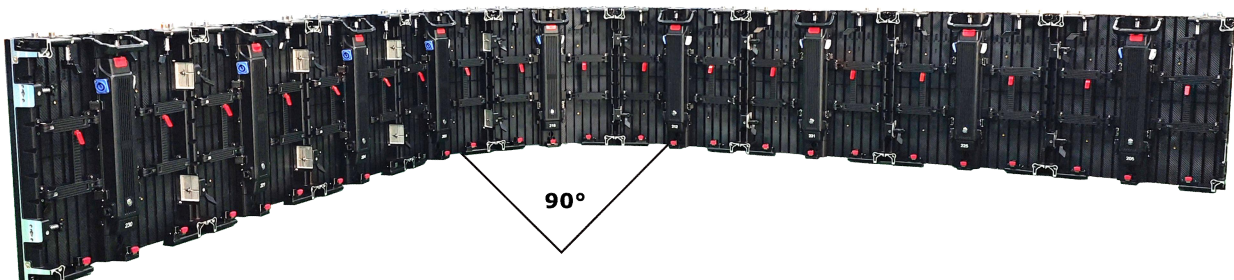

Round 90 degree by HoFLEX only, or HoFLEX mix with HoLite

HoLite/HoFLEX Specification

Item	HoLite / HoFLEX (Innovative Flexible LED for indoor/outdoor rental)					
Pixel Pitch	P1.9 indoor	P2.6 indoor	P2.9 indoor	P3.9 indoor	P3.9 outdoor	P2.9 outdoor
GOB (optional)	GOB	GOB	GOB	GOB	GOB	GOB
LED per pixel	SMD1212	SMD1515	SMD1515	SMD2020	SMD1921	SMD1415
Pixel Density(per sqm)	262,144	147,456	112,896	65,536	65,536	112,896
Module Dimension	250x250mm (WxH)					
Module Resolution(P)	128x128	96x96	84x84	64x64	64x64	84x84
Scan Rate	1/32	1/32	1/28	1/16	1/16	1/24
Cabinet Dimension	500x500x68mm(WxHxD)					
Cabinet Resolution(P)	256x256	192x192	168x168	128x128	128x128	168x168
Best View Distancing	>2m	>2m	>3m	>4m	>4m	>3m
Refresh Rate	3840Hz/7680Hz					
Viewing Angle(H/V)	160°/140°					
Cabinet Material	Die-casting aluminum					
Single Cabinet Weight	≈6.6kgs					
Brightness	800-1000nits				3500-4500nits	
Power Consumption	480W MAX				700w MAX	
Power Consumption	240w AVG				350w AVG	
Ingress Protection	IP31				IP65(F) / IP54(R)	
Lifetime(Hrs)	100,000					

*product spec are for reference only,the final interpretation right of product is reserved by Holiled

SHENZHEN HOLILED TECHNOLOGY CO.,LTD

Add:4F,No.5 Building,HKC Industrial Park, Shilong Community,
Shiyan,Bao'An,Shenzhen,China

<http://www.holiled.com>

sales@holiled.com
sales01@holiled.com
sales02@holiled.com
sales03@holiled.com
sales04@holiled.com
sales05@holiled.com
sales06@holiled.com
sales07@holiled.com
sales08@holiled.com